

Wave Cyber

sklolaminátové nádrže


s horným otvorom závit 2 1/2"				
typ = objedn. č.	objem, l	rozmery „mm“		
		A	B	D
W – 735	19,0	874	886	178
W – 835	25,0	874	886	203
W – 935	32,0	874	884	229
W – 1035	39,0	874	889	254
W – 1054	63,0	1367	1382	254
W – 1248	80,0	1214	1232	305
W – 1354	105,0	1361	1379	330
W – 1465	150,0	1651	1662	360

upozornenie

ceny filtračných nádrží s podstavcom

pracovný tlak max. 10 bar
 pracovný teplota max. 50 °C

rozmerná schéma nádrže

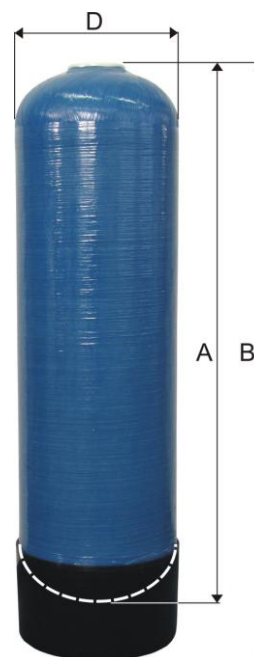

Wave Cyber

sklolaminátové nádrže

s horným otvorom závit 2 1/2"					
typ = objedn. č.	objem, l	rozmery „mm“			
		A	B	C	D
W - 1465	142,0	1662	320	---	360
W - 1665	185,0	1663	380	---	410

s horným otvorom závit 4"					
typ = objedn. č.	objem, l	rozmery „mm“			
		A	B	C	D
W - 1465-4	142,0	1662	320	---	360
W - 1665-4	185,0	1663	380	---	410
W - 1865-4	236,0	1717	458	---	481
W - 2162-4	312,0	1715	522	---	543
W - 2472-4	450,0	1901	600	---	619

s horným závitom 4" / so spodným závitom 4"					
typ = objedn. č.	objem, l	rozmery „mm“			
		A	B	C	D
W - 1465-4-4	148	1899	360	225	363
W - 1665-4-4	194	1861	400	225	413
W - 1865-4-4	236,0	2027	551	419	480
W - 2162-4-4	312,0	2027	551	437	544
W - 2472-4-4	450,0	2154	605	401	622
W - 3072-4-4	712,0	2129	770	345	772
W - 3672-4-4	1039,0	2159	932	368	927

pracovný tlak max. 10 bar
pracovná teplota max. 50 °C



s horným závitom 2 1/2" alebo 4"



s horným a spodným závitom 4"

Wave Cyber

sklolaminátové nádrže

s hornou prírubou 6" / so spodnou prírubou 6"

typ = objedn. č.	objem, l	rozmery „mm“		
		A	B	D
W - 1865-6-6	261,0	2087	1332	485
W - 2162-6-6	330,0	2126	1286	549
W - 2472-6-6	491,0	2223	1418	624
W - 3072-6-6	674,0	2202	1254	779
W - 3672-6-6	970,0	2213	1153	931
W - 4278-6-6	1326,0	2360	1362	1089
W - 4872-6-6	1688,0	2360	1284	1233
W - 6367-6-6	3590,0	2025	728	1625
W - 6386-6-6	3280,0	2453	1158	1625

pracovný tlak max. 10 bar
 pracovný teplota max. 50 °C

rozmierová schéma nádrže

